

# STANDARD FLAT RAIL PADS




## Specifications

**Vinyl Covering:** 18oz./sq. yd. fully COATED vinyl on base fabric scrim of 1,000 denier x 1,300 denier polyester. Fabric meets following tests: Tear Strength Tests: Warp 100 lbs., Fill 100 lbs., Grab Tensile Strength: Warp 410 lbs., Fill 410 lbs., Weft Insertion: 18x17. Vinyl compounded with UV inhibitors and mold inhibitors. Cold Crack: Minus 40 degrees F°.

**Filler Foam:** 1" and 2" thick polyurethane high impact foam.

**Attachment:** #2 brass grommets every 8".

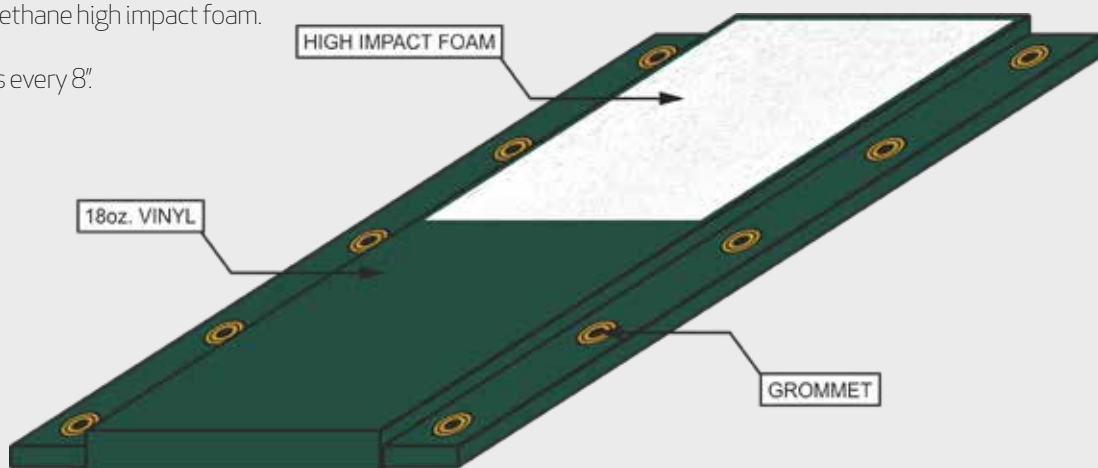

800-823-7356  
AerFloSports.com