

A-FLEX™ SOFT A-FRAME




Specifications

Vinyl Covering: 18oz./sq. yd. fully COATED vinyl on base fabric scrim of 1,000 denier x 1,300 denier polyester. Fabric meets following tests: Tear Strength Tests: Warp 100 lbs., Fill 100 lbs., Grab Tensile

Strength: Warp 410 lbs., Fill 410 lbs., Weft Insertion: 18x17. Vinyl compounded with UV inhibitors and mold inhibitors. Cold Crack: Minus 40 degrees F°.

Filler Foam: 3" thick polyurethane high impact foam.

Sign Attachment: 2" wide hook/loop.

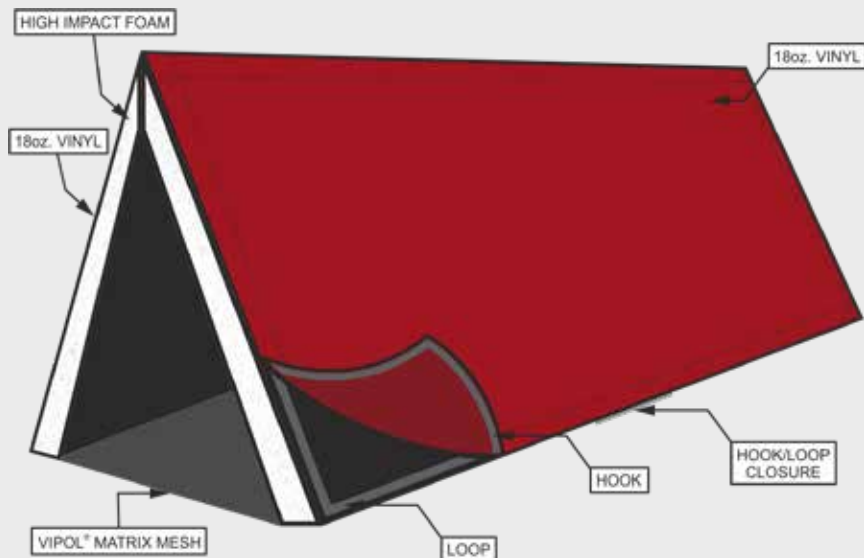

800-823-7356
AerFloSports.com