SPECIAL TEAMS MAT



CHROMA-BOND IMPRINTING


Specifications

Vipol® Matrix Mesh: Fabric & Construction: 1,000 denier x 800 denier (18 x 14 ends/inch). 10oz./sq. yd. 78% Shading. Tensile Strength: 360 x 320 lbs.

Perimeter Vinyl: 18oz./sq. yd. fully COATED vinyl on base fabric scrim of 1,000 denier x1,300 denier polyester. Fabric meets following tests: Tear Strength Tests: Warp 100 lbs., Fill 100 lbs., Grab Tensile Strength: Warp 410 lbs., Fill 410 lbs., Weft Insertion: 18 x 17. Vinyl compounded with UV inhibitors and mold inhibitors. Cold Crack: Minus 40 degrees F°.

Perimeter Pocket Weight: 1/4" Hot Dipped Galvanized Grade 30 Proof Coil Chain. Material Diameter is 0.276". Working Load Limits 1,300 lbs. Proof Load Test 2,600 lbs. Minimum Breaking Load 5,200 lbs. Inside Length 1.24" Inside Width 0.38" Weight Per Foot 0.63 lbs.

Chroma-Bond® Imprinting: 3" thick lines.

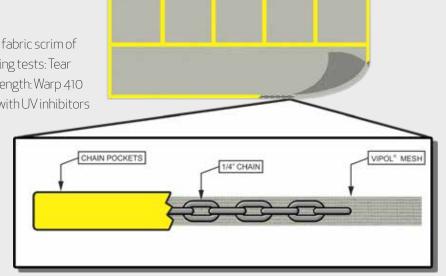



800-823-7356 AerFloSports.com