

U-SHAPED WOOD-BACKED RAIL PAD



Specifications


Backing: 3/4" B/C Exterior Grade Plywood

Vinyl Covering: 18oz./sq. yd. fully COATED vinyl on base fabric scrim of 1,000 denier x 1,300 denier polyester. Fabric meets following tests: Tear Strength Tests: Warp 100 lbs., Fill 100 lbs., Grab Tensile Strength: Warp 410 lbs., Fill 410 lbs., Weft Insertion: 18x17. Vinyl compounded with UV inhibitors and mold inhibitors. Cold Crack: Minus 40 degrees F°. Vinyl is wrapped fully around plywood and foam to fully cover front, back, and all edges. Full vinyl wrapping is fastened only on backside using stainless steel staples.

Filler Foam: 1 3/8" thick cross-link polyethylene foam.

Adhesive: Synthetic resin based demonstrating high flexibility, excellent water and heat/cold resistance, and superior bonding factor.

Attachment: 1/8" x 1 1/2" x 6" Aluminum Flat Bar, 2" x 2" zinc plated "L" bracket, 2" zinc plated EMT strap, #10 x 1 zinc plated hex screw and 1/4" zinc plated washer.

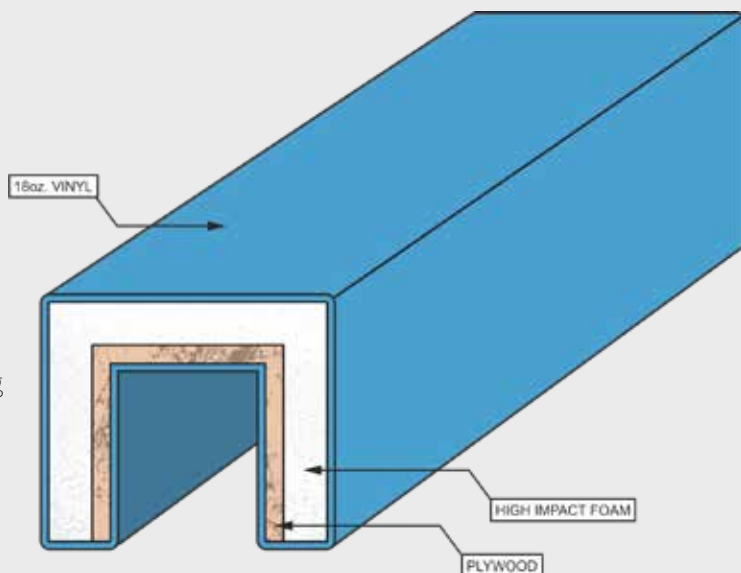

800-823-7356
AerFloSports.com