

# STADIUM PAD VINYL COVERING



## Specifications with the Chain Link Fence Washer


**Backing:** 3/4" B/C Exterior Grade Plywood

**Vinyl Covering:** 18oz./sq. yd. fully COATED vinyl on base fabric scrim of 1000 denier x 1300 denier polyester. Fabric meets following tests: Tear Strength Tests: Warp 100 lbs., Fill 100 lbs., Grab Tensile Strength: Warp 410 lbs., Fill 410 lbs., Weft Insertion: 18x17. Vinyl compounded with UV inhibitors and mold inhibitors. Cold Crack: Minus 40 degrees F°. Vinyl is wrapped fully around plywood and foam to fully cover front, back, and all edges. Full vinyl wrapping is fastened only on backside using stainless steel staples.

**Filler Foam:** 3" thick polyurethane high impact foam securely glued to 3/4" solid plywood backing.

**Adhesive:** Synthetic resin based demonstrating high flexibility, excellent water and heat/cold resistance, and superior bonding factor.

**Attachment:** 3" Diameter Circular Washer made of 1/8" Galvanized Steel. The cutout in the center of the washer is 3/8". **Hardware not included.**

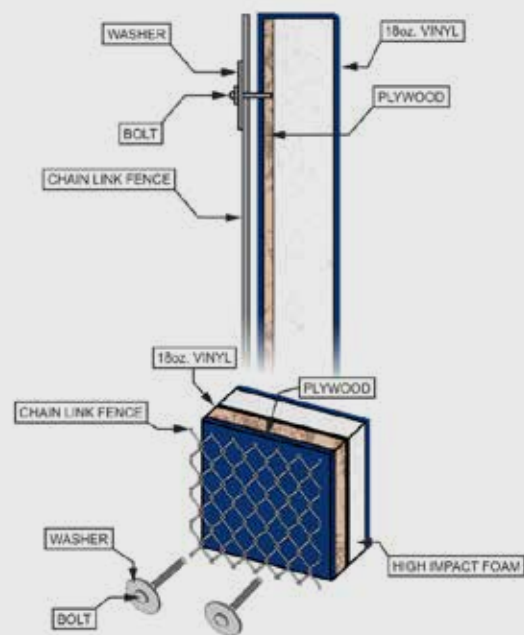

800-823-7356  
AerFloSports.com