

STAGE PADS





Specifications

Vinyl Covering: 18 oz./sq. yd. fully COATED fire-retardant vinyl on base fabric scrim of 1,000 denier x 1,300 denier polyester. Fabric meets following tests: Tear Strength Tests: Warp 100 lbs., Fill 100 lbs., Grab Tensile Strength: Warp 410 lbs., Fill 410 lbs., Weft Insertion: 18x17. Vinyl compounded with UV Inhibitors and Mold Inhibitors. Cold Crack: Minus 40 degrees F°.

Filler Foam: 1 3/8" thick cross-link polyethylene foam.

Attachment: 2" wide hook/adhesive loop.

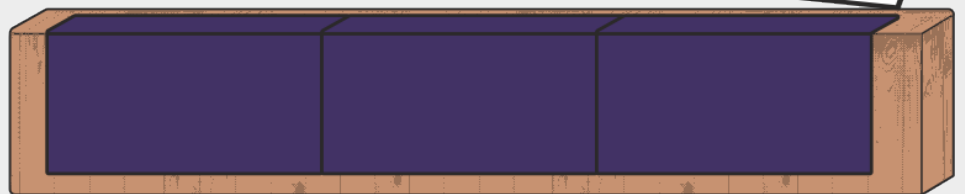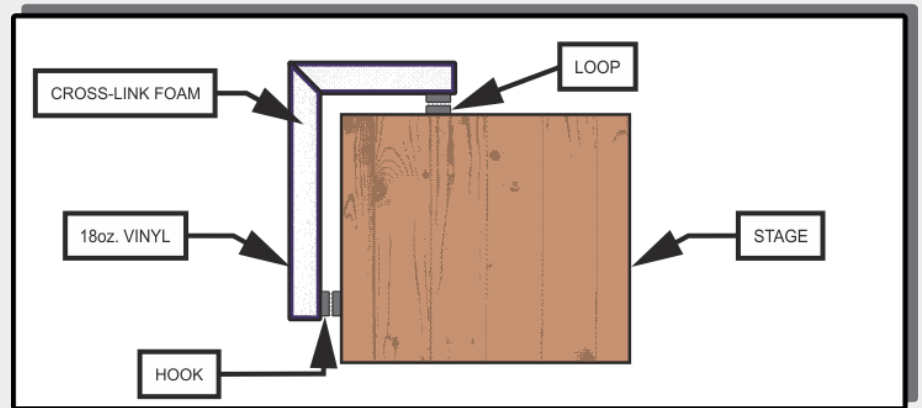

800-823-7356
AerFloSports.com